


t Leads

Internal Connection



## Series MKP RCP X2 Class 250 VAC / 275 VAC

Metallized Polypropylene dielectric capacitor and parallel with resistor packaged in a UL94V-0 plastic case and epoxy resin. Features include: Low DF & excellent high frequency characteristics, self-healing property and small size, withstand high pulse voltage and interference suppression, and excellent temperature characteristics. Applications include: Electric motor & starting pulse phase-shifting, energy suck in circuit and high frequency and high pulse voltage electronic circuits.

### Specifications

#### Temperature Range

-40°C - +100°C.

#### Capacitance Tolerance

±5%, ±10%, ±20%

#### Rated Voltage

250 VAC / 275 VAC.

#### Dissipation

$C_R \leq 1.0\mu\text{F}$ : .3% max at 20°C/10KHz.

$C_R > 1.0\mu\text{F}$ : .1% max at 20°C/1KHz.

#### Capacitance Range


X2: 0.047 $\mu\text{F}$  to 1 $\mu\text{F}$

at 20°C/1KHz

#### Dv/Dt

100V/ $\mu\text{s}$ .

Cap.	250 VAC / 275 VAC						
$\mu\text{F}$	Part #	M $\Omega$	P	W (max)	H (max)	T (max)	LD (dia)
0.047	MPRCP1M0473-15-00	1.0	15.0	18.0	14.5	7.5	0.6
0.1	MPRCP1M0104-15-00	1.0	15.0	18.0	14.5	8.5	0.6
0.22	MPRCP1M0224-22-00	1.0	22.5	26.5	17.0	8.5	0.6
0.33	MPRCP1M0334-22-00	1.0	22.5	26.5	17.0	8.5	0.6
0.47	MPRCP1M0474-27-00	1.0	27.5	32.0	20.0	11.0	0.6
0.82	MPRCS1M0824-27-00	1.0	27.5	32.0	23.0	13.0	0.6
1.0	MPRCP1M0105-27-00	1.0	27.5	32.0	23.0	13.0	0.6

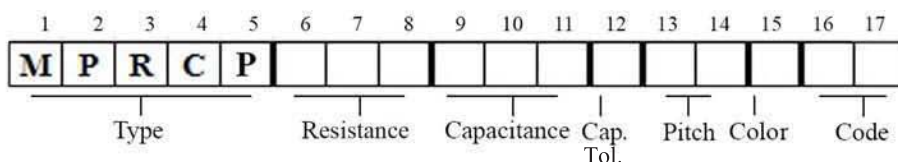

J	±5%	Y	Yellow	B	Blue
K	±10%	H	Grey	K	Black
		G	Green		